

1654nm 1000um PD TO FC/PC FC/APC Common datasheet

FEATURES

High responsivity
Low dark current
900-1740nm Spectral range

APPLICATIONS

Near-infrared sensing
Monitoring
Meter/Instruments

Part Number

Type	P/N
FC/PC	WIF3-1000
FC/APC	WIF3-1000A

Electrical-Optical Characteristics(T=25°C)



Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Responsivity	R	$\lambda=1654\text{nm}$, -5V	0.9	1		A/W
Dark current	I_d	VR=-5V			5.0	nA
Capacitance	C	VR=-5V, f=1MHZ		55	65	pF
Active Area	φ	-	995	1000	1005	um
Wavelength range	λ	-	900	1650	1740	nm

ABSOLUTE MAXIMUM RATING

Parameter	Symbol	Min	Max.	Unit
Operating Temperature	Top	-40	85	°C
Storage Temperature	Tstg	-40	125	°C
Forward current	IF	-	10	mA
Reverse voltage	VR	0	20	V

Package type :TO46

Pin Connection Type & Outline Drawings

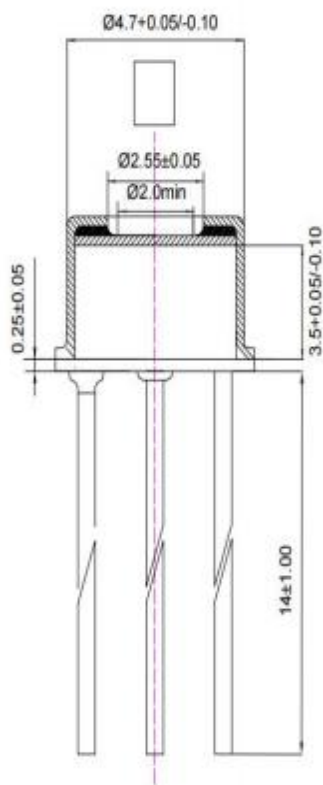

Pin Connection Type	
PIN	Number
1	PD+
2	PD-
3	GND

